

URMIII

Rental at Ease





Comfortable Handle



Diagonal-Shaped Heat Dissipation Bars




Contracted Frame

Efficient Modular Operation



Features

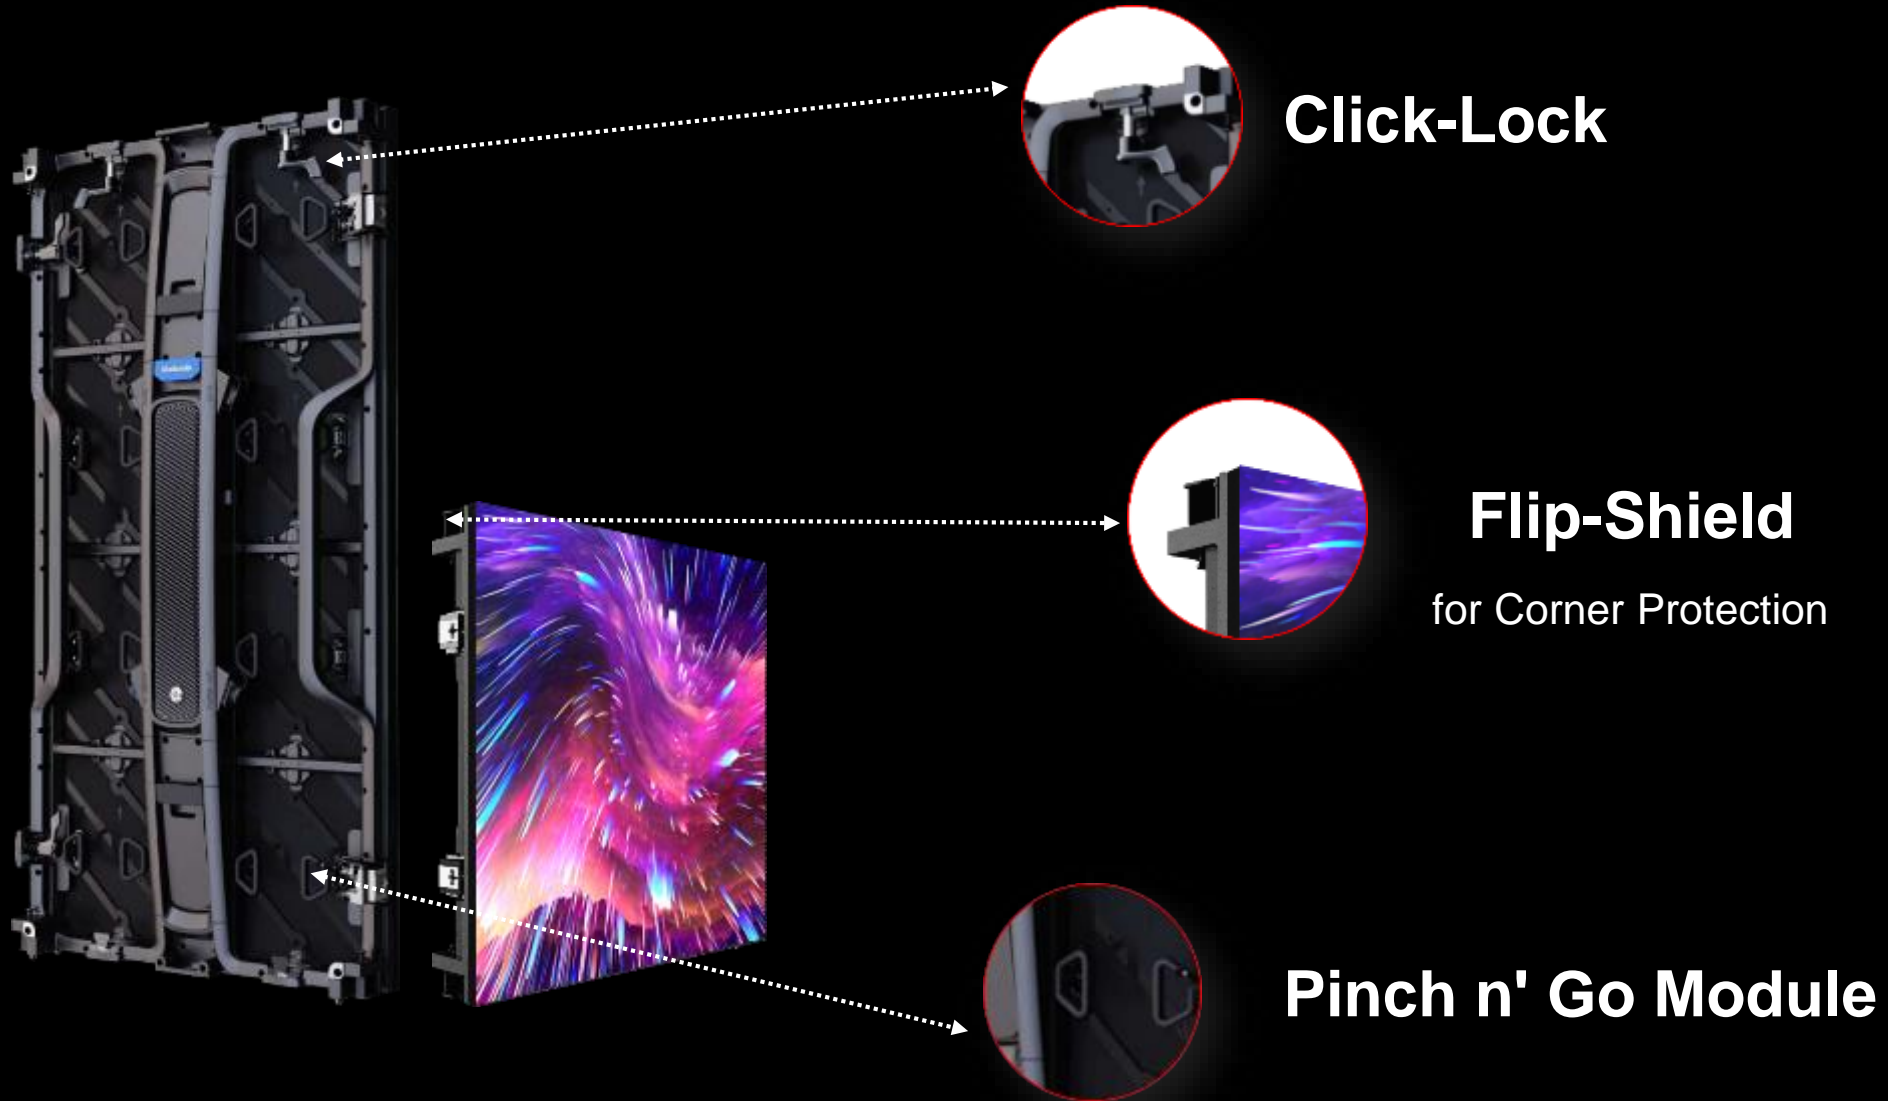

Click-Lock— True Single-Person Installation

Unilumin
URMIII—Rental at Ease

1

Click to pop up the King PIN

2

Through the touch of modules to completed the lock

3

Push the clasp inward with fingers to complete the locking reinforcement




Pinch n' Go Module— New Direction of Module

Unilumin
URMIII—Rental at Ease

Module Release



Pinch






Slightly Push Outward

Effectively improve the efficiency of screen maintenance, reduce maintenance time and energy.

Pinch n' Go Module— New Direction of Module

Unilumin
URMIII—Rental at Ease

Pull Back

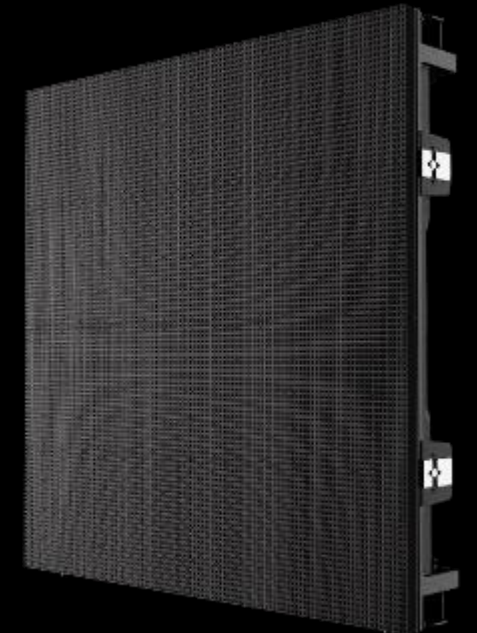


Simple pull-back and precise positioning systems make it convenient to ensure the flatness of the screen.

Flip-Shield— Comprehensive Corner Protection



3mm-Shield Above
Lamp Face

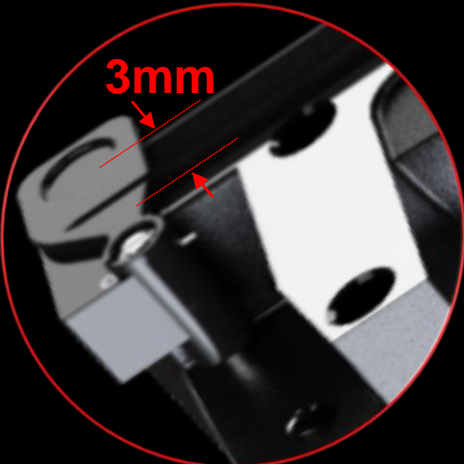



Pop Up Automatically



Effectively avoiding accidental impact from the lamp face, top and side, so as to achieve the effect of a three-dimensional(3D) surface protection.

Creative Installation

Unilumin
URMIII—Rental at Ease

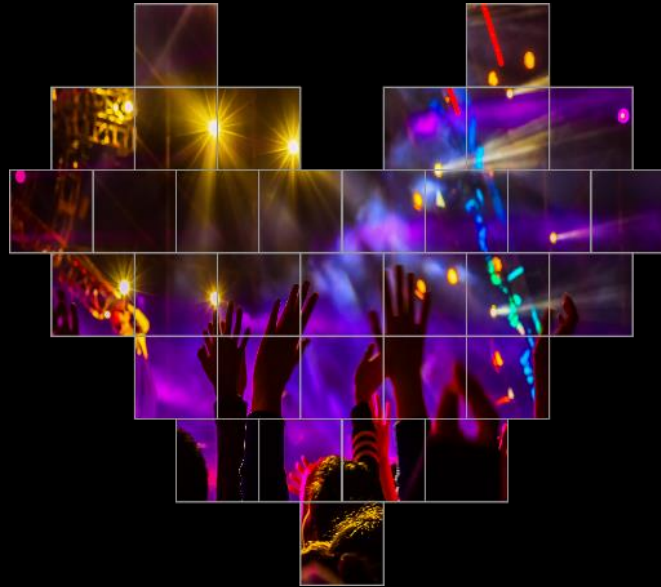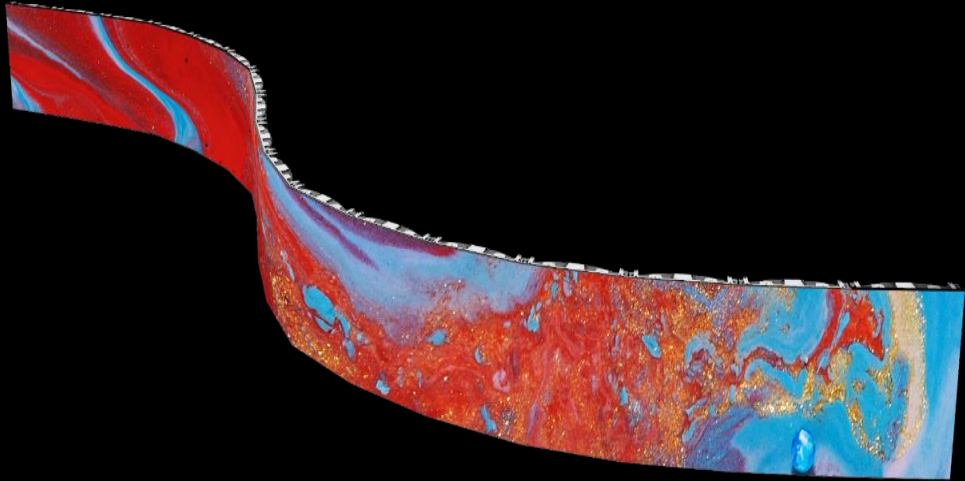

Curve Installation

-10° -8.75° -7.5° -6.25° -5° -3.75° -2.5° 0° -1.25° 1.25°
2.5° 3.75° 5° 6.25° 7.5° 8.75° 10°

Creative Installation

90° Corner Installation

More Features




HDR Technology



Compatible PSU Box



Bottom Protection



Modular Design

DDC Technology

(Dual Drive Configuration)

Unilumin
URMIII—Rental at Ease

Day Mode



Night Mode




Indoor and Outdoor Dual Use.

Day mode and night mode can be switched within 1 second.

ABS Technology

(Advanced Backup Sharing)

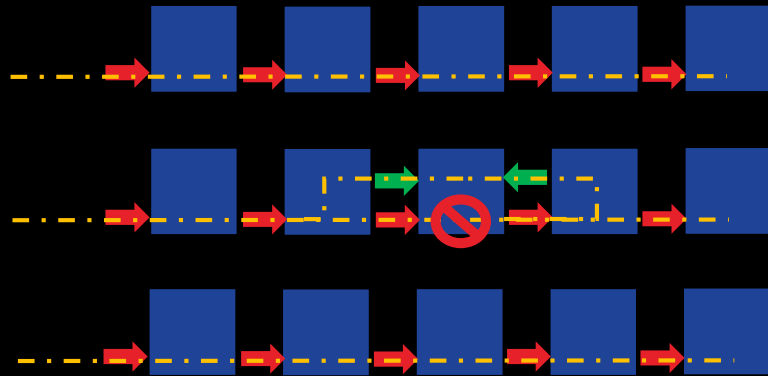

ABS technology can quickly solve the power failure of the power box without disassembly.

ABS technology plays a role of power backup, making the project safer and more stable.

Specification Parameter

Unilumin
URMIII—Rental at Ease

Type	URMIII2.6	URMIII2	URMIII3	URMIII03	URMIII04
Pixel Pitch	2.6mm	2.9mm	3.9mm	3.9mm	4.8mm
LED Type	3 in 1 SMD2121			3 in 1 SMD1921	
Brightness	800nits			4500nits	
Pixels Per Panel	192×192dots 192×384dots	168×168dots 168×336dots	128×128dots 128×256dots	128×128dots 128×256dots	104×104dots 104×208dots
Pixel Density	147,456	112,896	65,536	65,536	43,264
Panel Weight	7.9 kg/panel 13 kg/panel			8.5 kg/panel 13.9 kg/panel	
Module Size	W250mm×H250mm				
Cabinet Size	W500mm×H500mm×D83mm W500mm×H1000mm×D83mm				
Contrast ratio	3000:1				
Material	Die Cast Aluminum				
Environment	Indoor			Outdoor	
Ingress protection	IP30			IP65	
2020/707 Curve function	-10°~+10°				



Hanging Beam & Ground Beam Two in One



Mounting
(including ground beam, ground beam support, backrest, backrest connector)



URMIII



Design

Show a New Vision of Rental World



Functions

Multifunctional Combination



Performance



Joint Supplier Structure Design

Surprising Price!

Please contact our staff for more detail information.

Application

Unilumin
URMIII—Rental at Ease

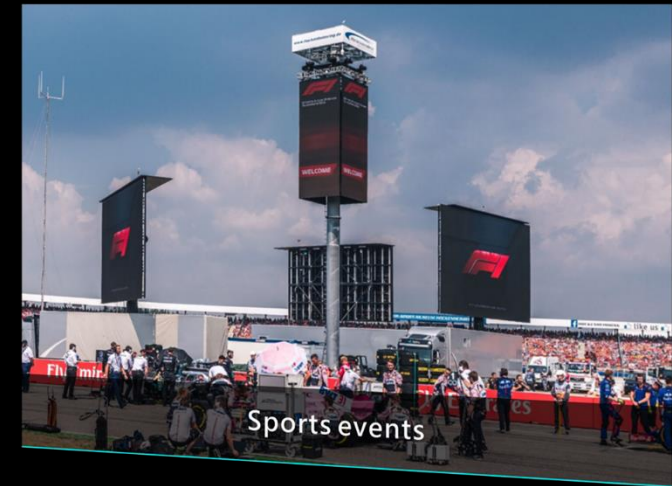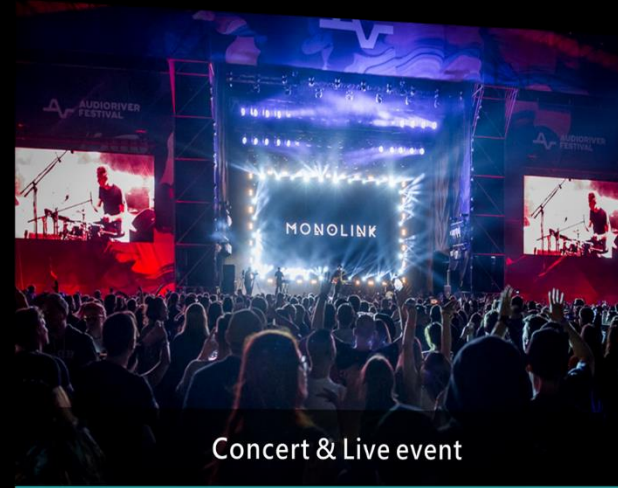

Application coverage: 100%

THANKS

Unilumin

TOGETHER, FOR A BRIGHTER FUTURE

Unilumin Group Co., Ltd.

Headquarters: 112 Yongfu Rd., Qiaotou Village, Fuyong Town, Baoan District, Shenzhen 518103 China

Factory Address: 6 Lanjing North Road, Pingshan District, Shenzhen 518118 China

Tel: +86-755-29918999

Fax: +86-755-29912092

Sales E-mail: sales@unilumin.com

Official website: <http://www.unilumin.com>

